

200L DIRECTED PUMP CIRCULATION SOLAR WATER HEATING SYSTEM

1) System components and description:


Part Name / Model No.		H-200S-OR
Description		200L directed pump circulation solar water heating system
Tank Capacity		200 Liters
Collector		HSC-01QT-10A (2.5m² enlarged version)
Absorber surface		Nickel bottom coating + Selective black chrome surface.
Number of collector		1 collector
Gross Absorber Area		2.5m ²
Tank Heat Exchanger		<i>Without heat exchanger</i>
Auxiliary Electric heater		2KW
Working station	Control System + thermostat	Full automatic control working station. Auto or manual start/stop the pump and the electric heater under preset mode. collector/pipeline frost protection, tank/collector high temperature protection.
	Circulation pump	WILO PH041E hot water circulation pump

2) Collector Specification:

Absorber coating: Nickel bottom coating + Selective black chrome surface.
 Optical Performance: Absorption: minimum 95% / Thermal Emission: ,maximum 12%
 Risers tube: 1886mm x Φ 10mm x δ 0.45mm
 Riser fin: Copper 1840mm x 125mm x δ 0.15mm
 Header tube: 1310mm x Φ 22mm x δ 0.6mm
 Number of Risers: 10 risers
 Frame Casing: Anodized Aluminum alloy
 Cover glass: 4mm tempered glass, low reflection, high transitivity up to 87%.
 (optional: 3.2mm low-iron, tempered patterned solar glass, transitivity up to 92%)
 Insulation: 25mm soft fiberglass layer + 25mm high- density fiberglass board.
 Back sheet: 0.5mm aluminum board.
 Sealing profile: EPDM-mixtured rubber
 Connection: Φ 22mm
 Ext. Dimension: 2000 x 1250 x 82mm (L x W x H)
 Gross /Absorber area: 2.5m²/2.38m²
 Operation pressure: 6.5Kpa / 6.5bar




3) Structure of the collector

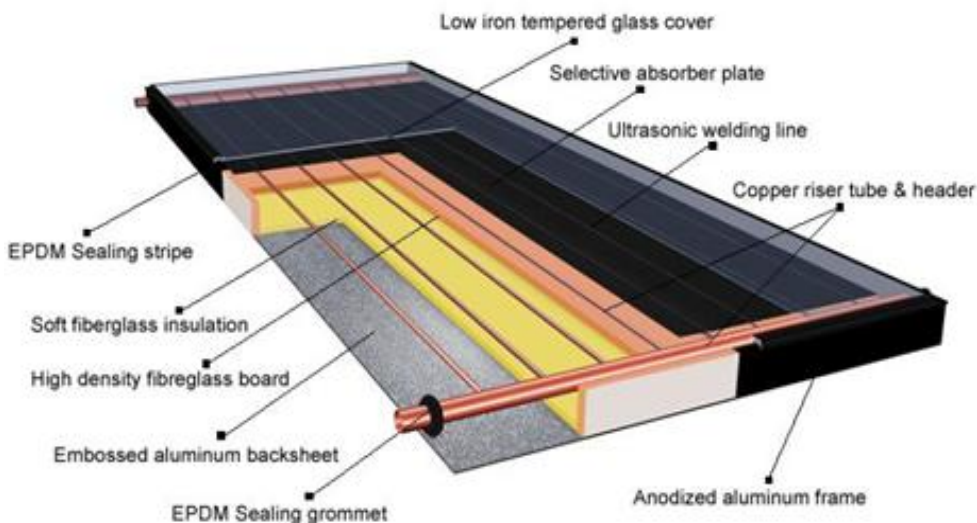

4) Water tank specification

Model Number	ST-200AV
Capacity	200 litres
Internal Tank material	1.5mm high grade steel
Internal Tank lining material	4mm Environmental Crystal plastic (Cross Linked Polymer)
Internal Tank Diameter	dia. 470mm x 1185mm
Outer Case Material	0.6 mm painted steel
Tank out Diameter	Dia. 555mm x 1321mm
Insulation thickness	45mm high-density Polyurethane
Working Pressure	6 bar
Heat Exchanger	<i>Without heat exchanger</i>
Tank accessories	1 x Pressure and temperature relief valve 1 x Auto air vent 1 x Vacuum breaking valve. 1 x 2KW electric heater

5) System Drawing:

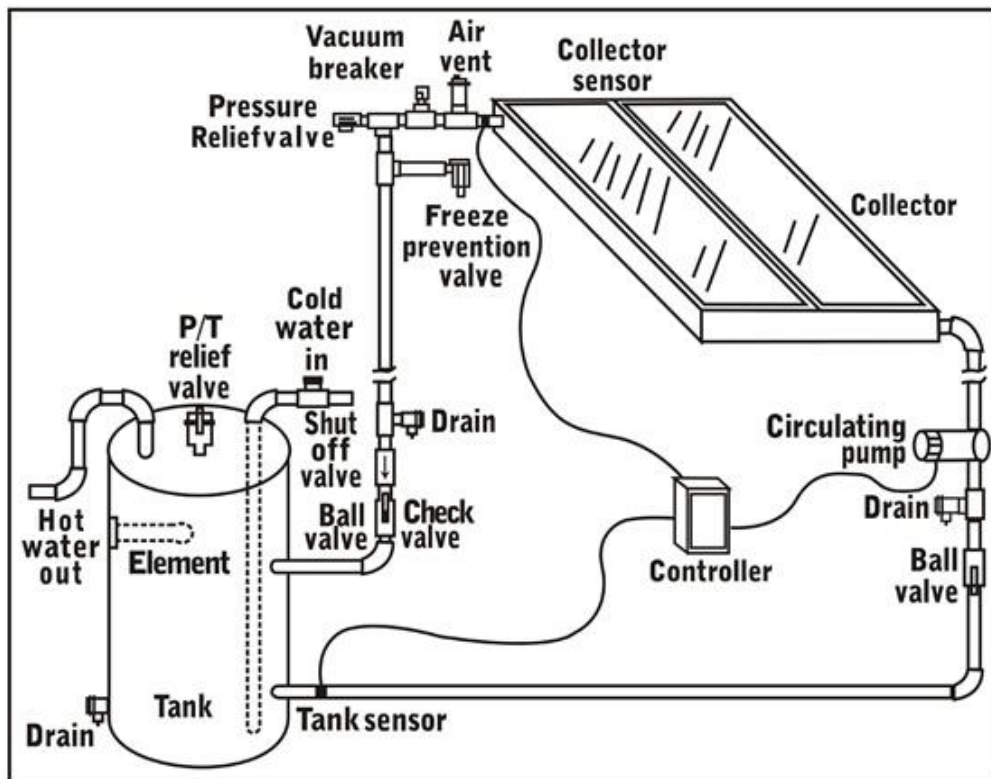

Typical direct pumped system